


Fixed Orifice Multi-Turn Balancing Valve

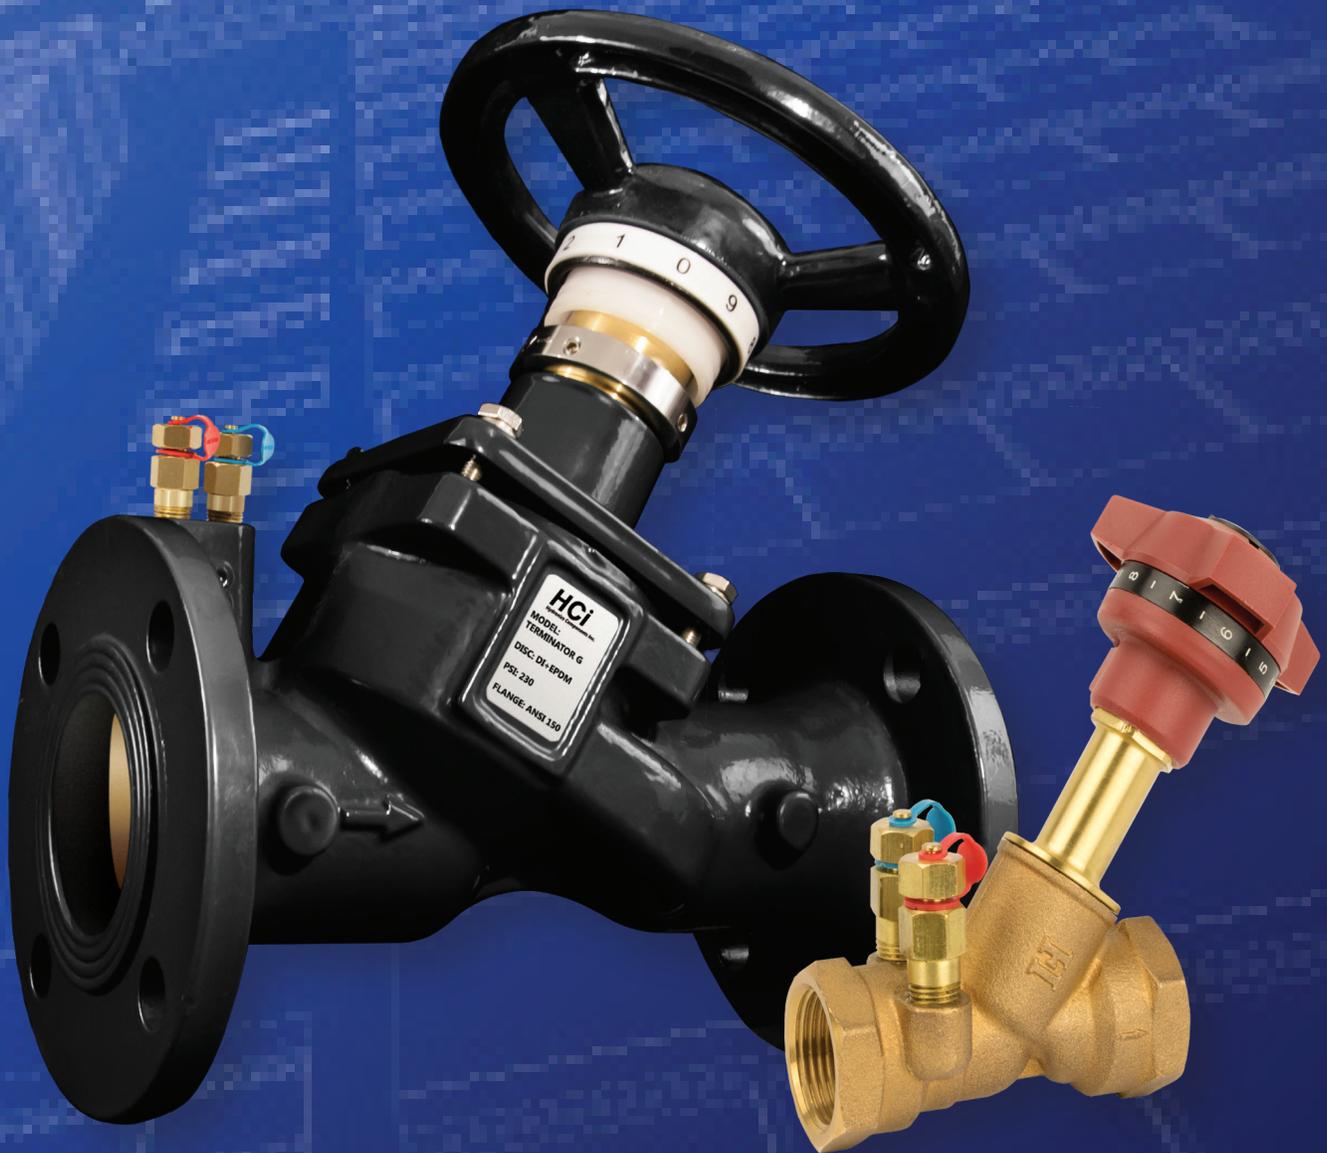


- +/- 5% accuracy versus less accurate "circuit setter" valves
- One step balancing process compared to complicated variable style
- Lockable memory stop handle
- Easy-turn handle / hand wheel for extra fine control
- Dezincification resistant bronze / epoxy coated cast iron body
- 1/2" - 2" Female NPT / 2-1/2" - 10" ANSI Class 150 Flange

Terminator G from  **Jomar**
HYDRONICS®

7243 Miller Drive, Warren, MI 48092 • (586) 268-1220 • www.jomarvalve.com

Terminator G w/Memory Stop 360 WOG

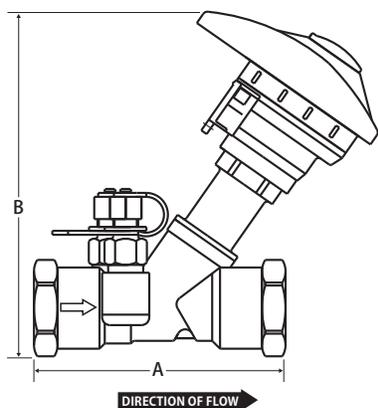

Features

- Integral metering orifice plate
- Characterized equal percent throttling disc
- $\pm 5\%$ flow measurement accuracy
- Microset hand wheel
- Memory stop handle setting
- Pressure and temperature ports
- NPT threads
- Dezincification resistant
- Conforms to BS 7350

Temperature Rating

- 360 WOG


Material Specifications

Part	Material
Body	Bronze - C83600
Bonnet (1/2" - 1-1/4") (1-1/2" - 2")	Brass - C35330 Bronze - C83600
Stem	Brass - C35330
Disc (1/2" - 3/4") (1" - 2")	Brass - C35330 Brass + PTFE - C35330
Orifice Insert	Brass - C35330
Hand Wheel	Plastic

Dimensions


Size	List Price	A	B	Cv	GPM
1/2"	\$74.12	3.43	4.45	1.49	1 - 4
3/4"	\$80.33	3.78	4.49	2.57	2 - 10
1"	\$104.88	3.94	5.31	4.11	4 - 20
1-1/4"	\$158.77	4.49	5.35	8.87	8 - 35
1-1/2"	\$179.23	4.92	5.94	14.56	12 - 50
2"	\$267.34	5.75	5.98	23.58	20 - 100

Smart Part Number Ordering Guide

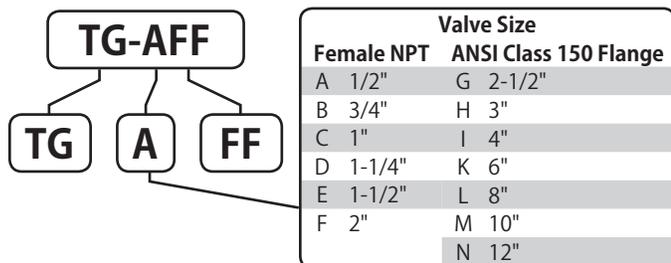

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Terminator G Flanged 230 WOG

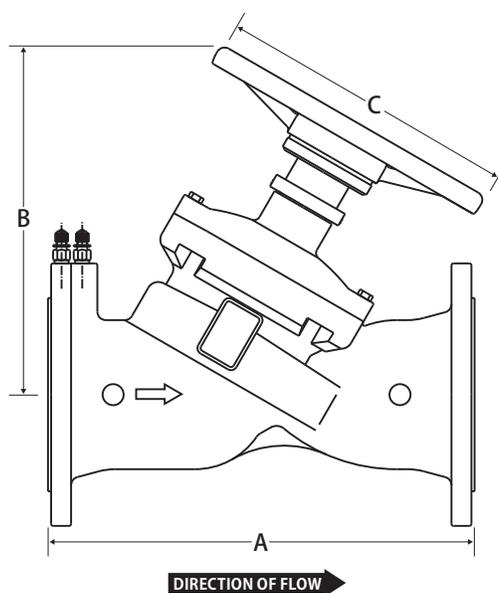

Features

- Integral metering orifice plate
- Memory stop handle setting
- $\pm 5\%$ flow measurement accuracy
- ANSI Class 150
- Pressure and temperature ports
- Face to face: DIN 3202-1/F1
EN-558-1 Series 1
- Flange: ANSI B16.5
- Conforms to BS 7350

Temperature Rating

- 15-250° F
- 230 WOG

Material Specifications

Part	Material
Body	Ductile Iron - ASTM A536
Bonnet	Ductile Iron - ASTM A536
Stem	410 Stainless Steel
Disc	EPDM Coated Ductile Iron - ASTM A536
Gland (2-1/2" - 6") (8" - 10")	Brass - C37700 Ductile Iron - ASTM A536
Stem Nut	Brass - C37700
Hand Wheel	Ductile Iron - ASTM A536
Test Valve	Brass - C35330
Orifice Insert	Brass - C37700
Packing	Graphite

Dimensions

Size	List Price	A	B	C	Cv	GPM
2-1/2"	\$682.63	11.42	10.43	7.87	89.96	45 - 210
3"	\$1,035.72	12.20	10.63	7.87	96.88	50 - 240
4"	\$1,335.38	13.78	12.20	9.45	140.13	100 - 450
6"	\$2,451.46	18.90	13.39	11.42	289.78	200 - 1100
8"	\$4,996.53	23.62	21.14	13.78	462.78	350 - 1500
10"	\$7,515.16	28.74	22.44	16.54	950.64	500 - 2500



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.