


Combination Ball Valve

Isolation Ball Valve • Union • 600 WOG



Terminator N

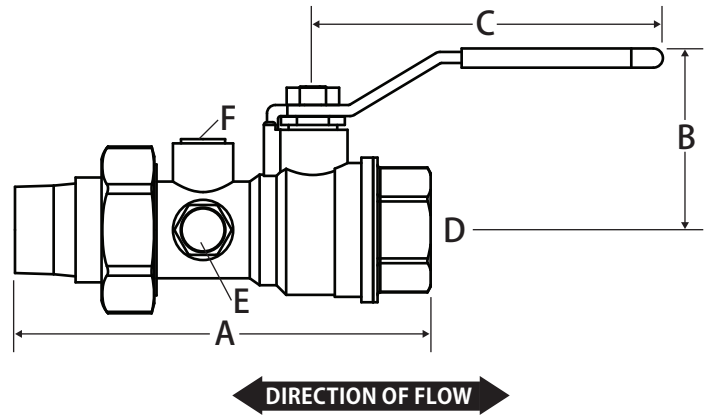

Features


- Pressure / temperature (PT) test ports
- Additional accessory tap
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested
- Made in Italy
- Leakproof steam - Lifetime warranty

Pressure and Temperature Rating

- 1/2" - 3/4" 600 WOG
- 1" - 2" 500 WOG
- 300°F Max

Body	Brass - CW617N
End Connection	Brass - CW617N
Ball	Chrome Plated Brass - CW617N
Seat (2)	Virgin PTFE
Stem	Brass - CW614N
Packing	Virgin PTFE
Stem O-ring (2)	Viton®
Packing Gland	Brass - CW614N
Handle	Steel - Geomet® Plated
Handle Nut	Steel - Geomet® Plated
Union O-ring	Viton®
Tail Piece	Brass - CW617N
Union Nut	Brass - CW617N

Smart Part Number Ordering Guide

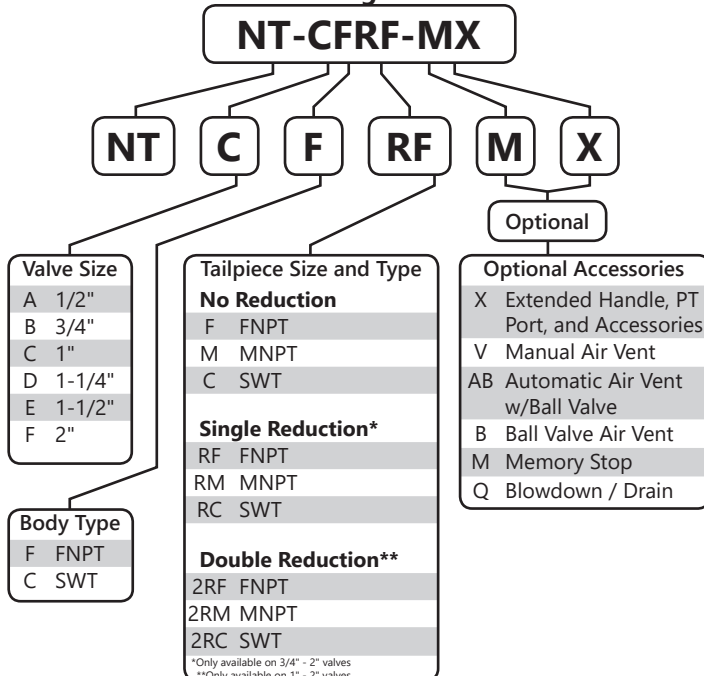

Dimensions

Size	A*	B	C	D	E	F	Cv
1/2"	4.68	1.53	2.95	0.59	0.25	0.25	16.82
3/4"	4.73	1.93	3.74	0.79	0.25	0.25	34.80
1"	5.44	2.40	4.72	1.00	0.25	0.25	52.20
1-1/4"	6.45	2.59	4.72	1.25	0.37	0.25	112.52
1-1/2"	7.10	3.22	5.90	1.57	0.37	0.25	174.00
2"	7.68	3.50	5.90	2.00	0.37	0.25	255.20

*Length is for a FNPT x MNPT valve, additional dimensions available upon request

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.